



Only the GN Netcom Profile SureFit® gives you three interchangeable wearing styles—flexible earhook, earloop and headband—in one headset. And it comes in three models: the Profile SF, with our ultra-thin, telescoping boom and omnidirectional microphone; the Profile Flex SF, with our any-position flexible boom and noise-canceling microphone; and the Profile UNC SF, with our ultra-noise canceling microphone and fixed boom. All three feature our exclusive SureFit flexible earhook, the ultimate in customized, on-the-ear comfort. So no matter what your preference, over-the-head or on-the-ear, Profile SureFit is the comfortable solution. If you need a top quality convertible headset, the one you need is Profile SureFit.

Features

- Three wearing styles
- Omnidirectional, noise-canceling or ultra-noise-canceling microphone
- SureFit flexible earhook, earloops and Stay-Put™ click-stop headband
- Ratcheting boom: fixed (telescoping) or flexible
- The lightest professional headset
- Two-year "No Fine Print" Warranty


Benefits

- The ultimate in personal choice
- The right choice for your work environment
- Comfortable, custom fit in both on-the-ear and over-the-head styles
- Boom stays where you want it
- Easy-to-wear comfort
- Worry-free ownership

GN NETCOM HEADSETS ARE DESIGNED TO:

- ★ Increase productivity
- ★ Minimize mistakes and misunderstandings
- ★ Reduce talk time per call
- ★ Increase calls per day
- ★ Maximize profitability
- ★ Ensure safety by protecting users' hearing

GN Netcom is the innovator in hands-free communications technology. From the first headset with a noise-canceling microphone to the first professional-quality Bluetooth™ headset, our products work harder to help you be more productive.

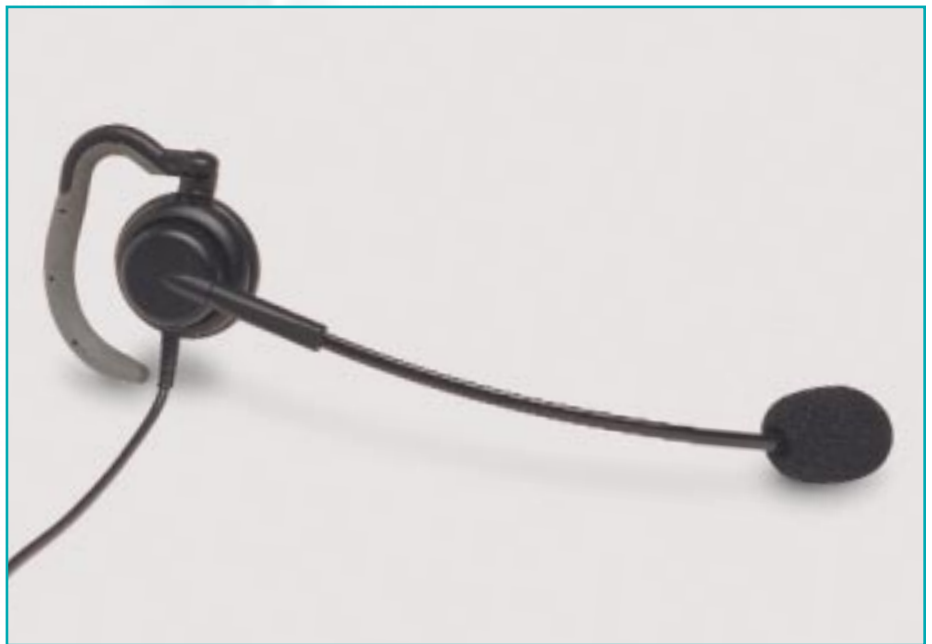

PROFILE SureFit


THE WORLD'S ONLY THREE-IN-ONE HEADSET.




All Profile SF models give you three interchangeable wearing styles: our SureFit flexible earhook, earloops (4 sizes), and a fully adjustable click-stop headband.



The Profile SF, with our ultra-thin, telescoping boom and omnidirectional microphone.



The Profile Flex SF adds the convenience of a fully flexible, super-durable boom, topped off with a noise-canceling microphone.



The Profile UNC SF gives you three-in-one Profile convenience, plus the most effective noise-canceling microphone in the industry.

There's a GN Netcom amplifier for every need and every application. Like our headsets, all GN Netcom amplifiers feature a two-year warranty.



The GN 8000 Series Multi-Purpose Amplifier works on most phone systems with a modular handset connector. It features a built-in headset stand with an on-line indicator option that signals when the headset is in use.



Our 0686 In-line Amplifiers provide a cost-effective option for standard carbon applications. Incredibly compact, they feature a rotary wheel for a broad range of volume adjustments. Also available with a mute button, **0686M**.



The 0452 Two-Prong Amplifier is designed for telephones equipped with a two-prong headset port. Its 3-position volume control locks your volume preference in place.

Also available: The 0911 Two-Prong 6-Wire Amplifier, for push-to-talk dispatch/911 environments; and the GN 7100 Headset Telephone, a professional-quality telephone with an integrated headset—ideal for PBX and CTI applications.

SureFit earhook: US patent 6.418.230

Standard Features	Profile SF	Profile Flex SF	Profile UNC SF
Universal Telephone Interface	Δ	Δ	Δ
Noise-Canceling Microphone		Δ	Δ
Flexible Microphone Boom		Δ	
Multiple Wearing Styles	Δ	Δ	Δ
Click-Stop Headband	Δ	Δ	Δ
GN Netcom-compatible Quick Disconnect	Δ	Δ	Δ
Two-Year "No Fine Print" Warranty	Δ	Δ	Δ
Best Sound, Comfort, Durability	Δ	Δ	Δ

Transmit Specifications

Microphone:	Profile SF headsets are available with omnidirectional, noise-canceling and ultra-noise-canceling electret microphones.
Frequency Response:	100-6,200 Hz
Distortion:	Less than 3%
Current Consumption:	< 150 μA @ 3 V (DC)
Operating Voltage:	1.8–24 V (DC)

Receive Specifications

Speaker:	Dynamic
Input Impedance:	300 ohms (typical)
Frequency Response:	300-4,300 Hz
Automatic Gain Control (AGC) Threshold Level with amplifier:	-38 ± 3.5 dBV
Volume Control Range:	32 ± 4 dB
Maximum Output (UL Rating):	<118 dB SPL

General Specifications

Operating Temperature:	0°–50° C
Polarity:	Non-polar in amplified applications
Weight (headset and cord):	1 oz.
Dielectric Withstand Voltage:	5,000 V AC or 7,000 V DC
Safety:	Registered to UL 1459 FCC Parts 68 Registered OSHA Part 1910 subpart S CSA C22.2 No. 225-M90

GN Netcom
Like being there

For more information: